

SECOND-ORDER TWO-TEMPERATURE MODEL FOR THIN METAL FILM SUBJECTED TO THE ULTRASHORT LASER PULSE

E. Majchrzak and J. Dziatkiewicz

Institute of Computational Mechanics and Engineering, Silesian University of Technology, Gliwice, Poland

e-mail: ewa.majchrzak@polsl.pl, jolanta.dziatkiewicz@polsl.pl

1. Introduction

Thin metal film subjected to the ultra-short laser pulse is considered. Mathematical description of the process discussed is based on the system of four equations. Two of them describe the electrons and lattice temperature, while third and fourth equations represent the generalized Fourier law, it means the dependences between the electrons (lattice) heat flux and electrons (lattice) temperature gradient. Depending on the order of the generalized Fourier law expansion into the Taylor series, the first- and the second-order model can be obtained. In contrast to the commonly used first-order model, here the second-order two-temperature model is considered. The problem is solved using the explicit scheme of the finite difference method. The example of computations is also presented.

2. Governing equations

The two-temperature model describes the temporal and spatial evolution of the lattice and electrons temperatures (T_l and T_e) in the irradiated metal by two coupled nonlinear differential equations [1, 2] (1D problem)

$$(1) \quad C_e(T_e) \frac{\partial T_e(x, t)}{\partial t} = -\frac{\partial q_e(x, t)}{\partial x} - G(T_e)[T_e(x, t) - T_l(x, t)] + Q(x, t)$$

and

$$(2) \quad C_l(T_l) \frac{\partial T_l(x, t)}{\partial t} = -\frac{\partial q_l(x, t)}{\partial x} + G(T_e)[T_e(x, t) - T_l(x, t)]$$

where $T_e(x, t)$, $T_l(x, t)$ are the temperatures of electrons and lattice, respectively, $C_e(T_e)$, $C_l(T_l)$ are the volumetric specific heats, $G(T_e)$ is the electron-phonon coupling factor which characterizes the energy exchange between electrons and phonons [3], $Q(x, t)$ the source function associated with the irradiation.

In a place of the classical Fourier law the following formulas are introduced

$$(3) \quad q_e(x, t + \tau_e) = -\lambda_e(T_e, T_l) \frac{\partial T_e(x, t)}{\partial x}$$

and

$$(4) \quad q_l(x, t + \tau_l) = -\lambda_l(T_l) \frac{\partial T_l(x, t)}{\partial x}$$

where $\lambda_e(T_e, T_l)$, $\lambda_l(T_l)$ are the thermal conductivities of electrons and lattice, respectively, τ_e is the relaxation time of free electrons in metals, τ_l is the relaxation time in phonon collisions.

Using the second order Taylor expansion, the equations (3) and (4) can be written in the form

$$(5) \quad q_e(x, t) + \tau_e \frac{\partial q_e(x, t)}{\partial t} + \frac{\tau_e^2}{2} \frac{\partial^2 q_e(x, t)}{\partial t^2} = -\lambda_e(T_e, T_l) \frac{\partial T_e(x, t)}{\partial x}$$

and

$$(6) \quad q_l(x, t) + \tau_l \frac{\partial q_l(x, t)}{\partial t} + \frac{\tau_l^2}{2} \frac{\partial^2 q_l(x, t)}{\partial t^2} = -\lambda_l(T_l) \frac{\partial T_l(x, t)}{\partial x}$$

The source function $Q(x, t)$ is associated with the laser irradiation [3]

$$(7) \quad Q(x, t) = \sqrt{\frac{\beta}{\pi}} \frac{1-R}{t_p \delta} I_0 \exp \left[-\frac{x}{\delta} - \beta \frac{(t-2t_p)^2}{t_p^2} \right]$$

where I_0 is the laser intensity, t_p is the characteristic time of laser pulse, δ is the optical penetration depth, R is the reflectivity of the irradiated surface and $\beta = 4 \ln 2$.

For $x = 0$ and $x = L$ the non-flux conditions are assumed. The initial condition $T_e(x, 0) = T_l(x, 0) = T_p$ is also known.

3. Example of computations

The problem formulated is solved using the finite difference method with staggered grid (Figure 1). As an example of computations, the thin metal films of thickness 100 nm made of gold and copper are considered. The values of thermophysical parameters are taken from [1-4]. The laser parameters are the following: $I_0 = 10 \text{ J/m}^2$ and $t_p = 0.1 \text{ ps}$. In Figure 1 the electrons and lattice temperature histories at the irradiated surface are presented.

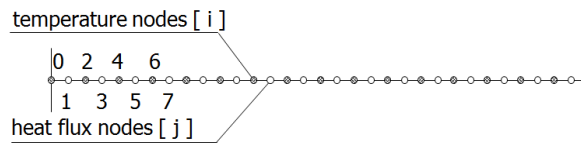


Fig. 1. Discretization

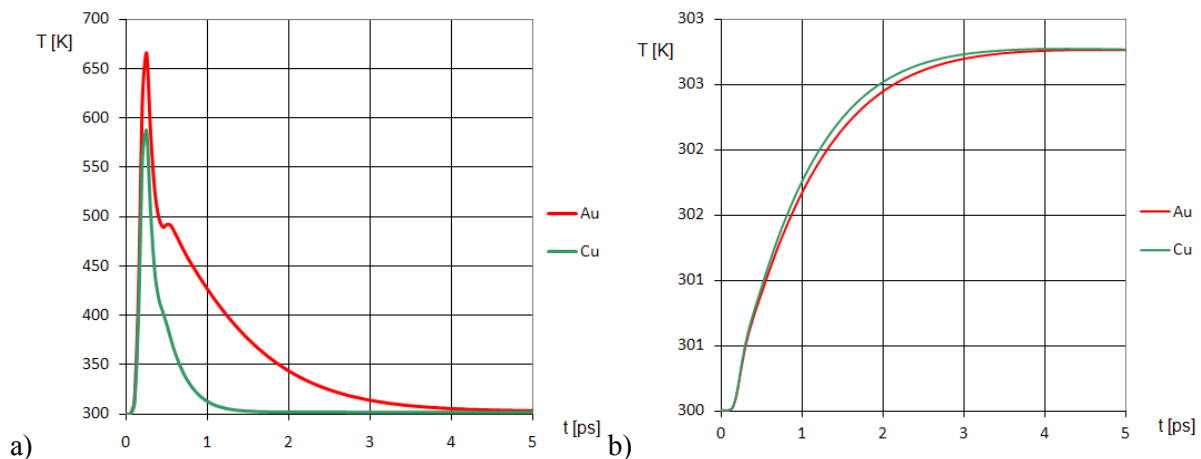


Fig. 1. Temperature history on the irradiated surface for Au and Cu: a) electrons, b) lattice

4. Conclusions

The second-order two-temperature model is considered. The comparison of the results obtained using the first- and second-order models will be shown in the full version of the paper. On this basis, the conclusions will be formulated, in particular for which laser parameters the first-order model is sufficient, and when the higher-order model should be used.

Acknowledgments The research is funded from the projects Silesian University of Technology, Faculty of Mechanical Engineering.

References

- [1] Z.M. Zhang. *Nano/microscale heat transfer*, McGraw-Hill, 2007.
- [2] Z. Lin, L.V. Zhigilei and V.Celli, Electron-phonon coupling and electron heat capacity of metals under conditions of strong electron-phonon nonequilibrium, *Phys. Rev. B.*, 77:075133-1, 2008.
- [3] J.K. Chen and J.E. Beraun. Numerical study of ultrashort laser pulse interactions with metal films, *Numer. Heat Tr A-Appl.*, 40:1, 2001.
- [4] E.Majchrzak, J.Dziatkiewicz and Ł.Turchan. Analysis of thermal processes occurring in the microdomain subjected to the ultrashort laser pulse using the axisymmetric two-temperature model, *Int. J. Multiscale Comput. Eng.*, 15, 5: 395, 2017.